


# Alarm Fuses

## P4-PL4, P3-PL3 Fuse

Normal blow



NTT spec.

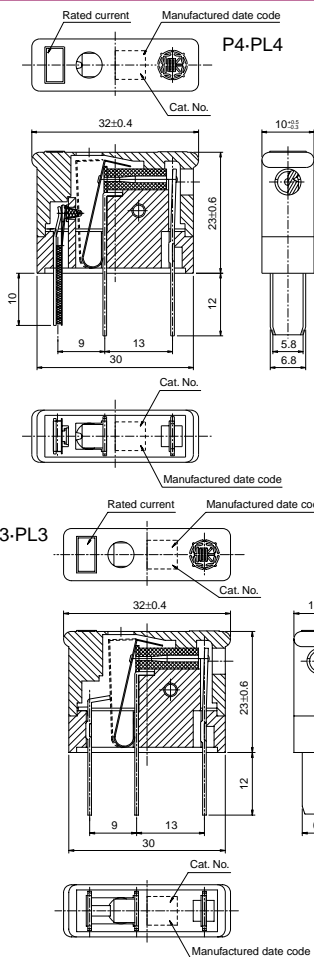


- Physical Size · Net Weight  
32 × 10 × 35mm 9.5g
- Color  
P4, P3 : Black  
PL4, PL3 : Brown
- Package  
100Pcs/Box
- Applicable Fuseholders  
P4, PL4 : Type P4 Fuseholders  
P3, PL3 : Type P3 Fuseholders


Cat. No.	Rated Current	Clearing Current <sup>*1</sup>	Breaking Capacity	Typ. Resistance <sup>*2</sup>
P[ ]03	0.3A	0.7A	AC 220V 2,500A  DC 250V 1,500A	2Ω
P[ ]05	0.5A	1A		1.3Ω
P[ ]13	1.3A	2A		0.5Ω
P[ ]20	2A	3A		62mΩ
P[ ]30	3A	4.5A		44mΩ
P[ ]35	3.5A	5.3A		34mΩ
P[ ]50	5A	7.5A		28mΩ
PL[ ]75	7.5A	11A	AC 125V 2,500A	18mΩ
PL[ ]100	10A	20A	DC 125V 1,500A	10mΩ
PL[ ]150	15A	30A	AC/DC 125V 1,000A	8mΩ

[ ] mean either "3" or "4"  
<sup>\*1</sup> : Clearing Current within 1 minute  
<sup>\*2</sup> : at 10% max. rated current  
 Note : Alarm contact capacity  
 P4, PL4 ; 200VA Max. AC 220V/DC 250V Max. 5A  
 P3, PL3 ; 50VA Max. AC 220V/DC 250V Max. 5A

### Clearing Characteristics

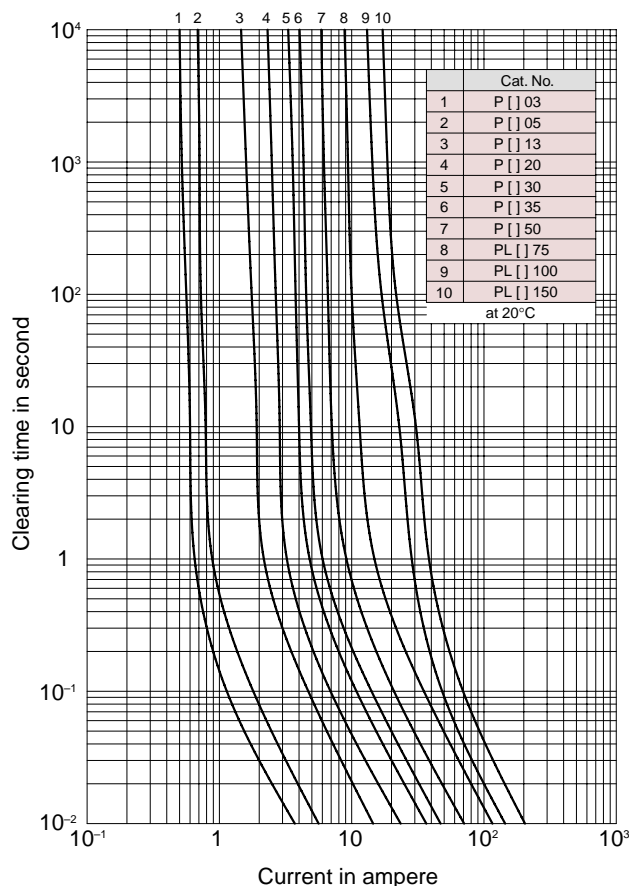

### I<sup>2</sup>t Characteristics

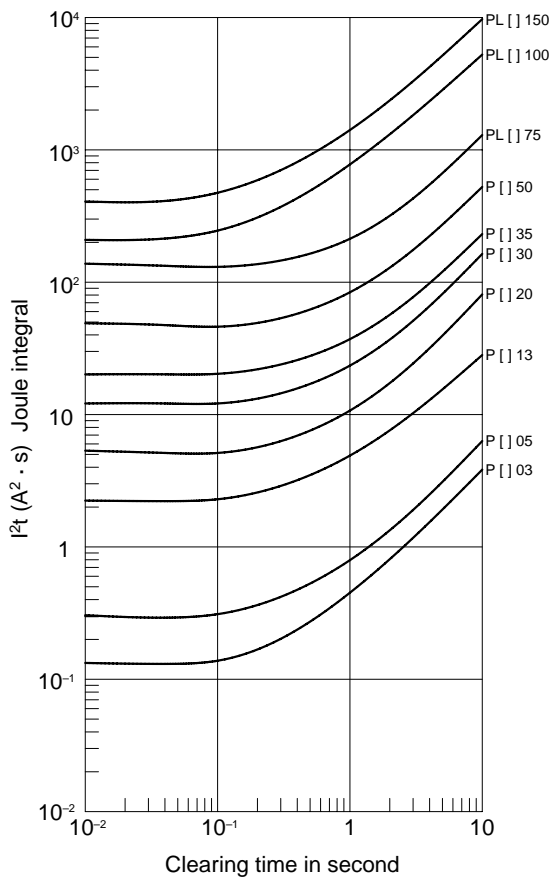

Information in this catalog may be subject to change without notice. Please confirm product information when ordering.